



(M) +91 93769 80606

Email : indiahub@celluxusa.com

805, ISQUARE, Science City Road, Ahmedabad, Gujrat, India.



COMPANY PROFILE

iCellux is an experienced manufacture for adhesive tapes with strong ability on researching, developing, and production. Our products range is wild to be applied in general purpose, industrial field, furniture, electronic field, and tec. We devote supply satisfied products meeting different requirement for special application from customers, and provide solutions for different applications.

- 01 Protective Film tape
- 01 Stretch Film
- 02 PVC Electric Insulating Tape
- 02 Aluminium Foil tape
- 03 PVC Duct/Pipe Wrapping Tape / PVC Lane Marking
- 04 Duct Cloth tape
- 04 Crepe Paper Masking tape
- 05 OPP packaging tape
- 06 Kraft tape
- 06 Bag Sealing Tape
- 07 Filament Tape
- 08 Double Side Coated
- 08 Double Sided Tissue Tape
- 09 Double Sided Foam Tape
- 10 Double Sided Polyester Tape
- 10 Double side PP Tape
- 11 Double side Cloth Tape
- 11 Double -coated Acrylic Foam Tape



We supply not only qualified products but also
satisfied service.


Protective Film tape

Protective film tape is polyethylene film coated with pressure sensitive acrylic adhesive. Main used for surface protection for all kinds of aluminum, plastic composite plates, color steel, aluminum plates, stainless steel, and etc, from scratch, pollution, damage and UV corrode during transportation, storage, and installation.

Application


Stainless steel, Aluminum profile and plate, Window glass, Sheet, Steel plate, Carpet, Building and decoration materials

Thickness	Length	Adhesiion	Elongation	Heat resistance
0.030mm~0.050mm	100m~1000m	5g~50g	300%	60°C
0.030mm~0.070mm	100m~1000m	50g~150g	300%	60°C
0.030mm~0.070mm	100m~1000m	150g~450g	300%	60°C
0.030mm~0.100mm	100m~1000m	450g~2000g	300%	60°C

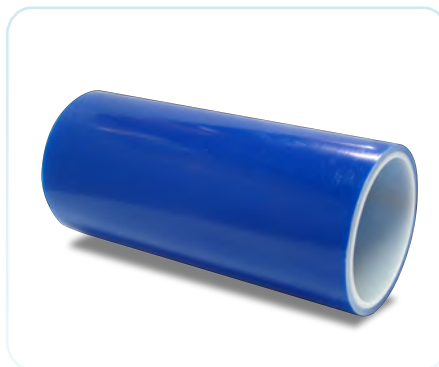

Stretch Film

Stretch film is produced by three layer common extruding machines, can be surely up to both level in terms of appearance and quality. Available for both hand and machine use. Wildly used for packing of furniture, electronic, transportation, and etc.

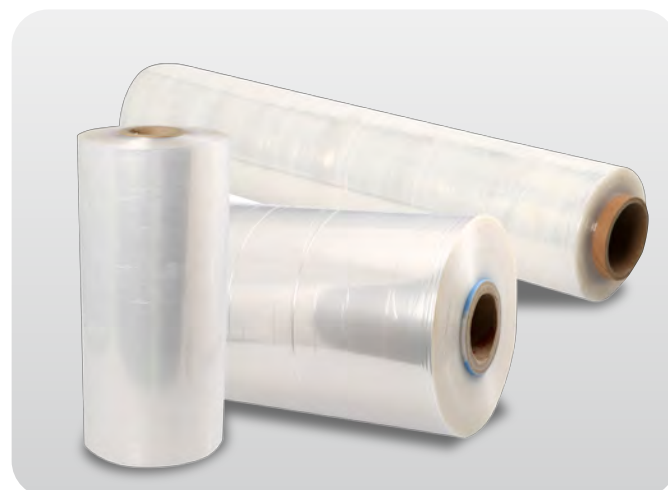



PVC Electric Insulating tape

PVC electric insulating tape is vinyl carrier coated with natural rubber adhesive. It is commonly used to connect separated electrical wires for insulating purposes. Excellent properties in resisting high voltage, tolerating a wide temperature and flame retardant.




Aluminium Foil tape

Aluminium foil tape is produced from soft-tempered aluminium foil coated with an pressure sensitive acrylic based adhesive. It can be used for lamination for air-conditioning ducting systems, cold storage insulation, and temporary sealing of gaps. Wild range foil thickness supply for various applications on request.

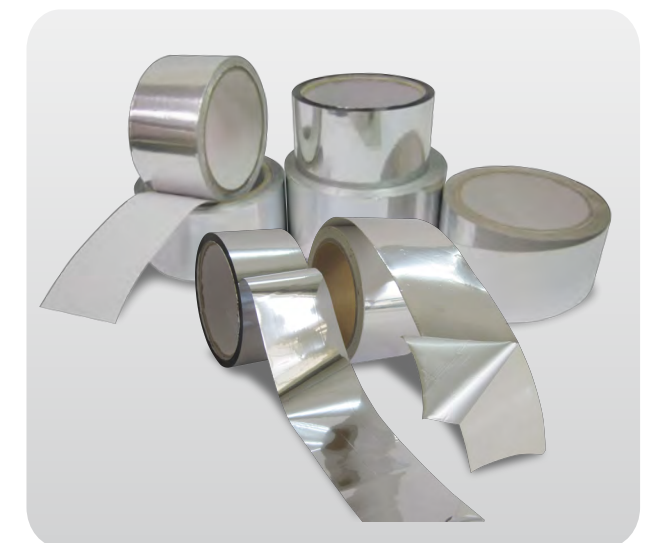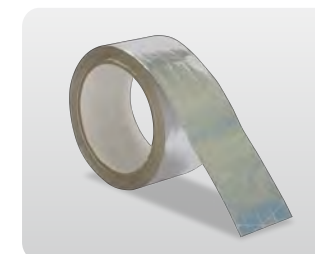

PVC Duct/Pipe Wrapping Tape / PVC Lane Marking

PVC duct / pipe wrapping tape is printed vinyl carrier coated with natural rubber adhesive. It is commonly used for corrosion protection of ground and underground pipe wrapping application, and industrial assembly. Excellent moisture, solvent, temperature resistance, and flame retardant.

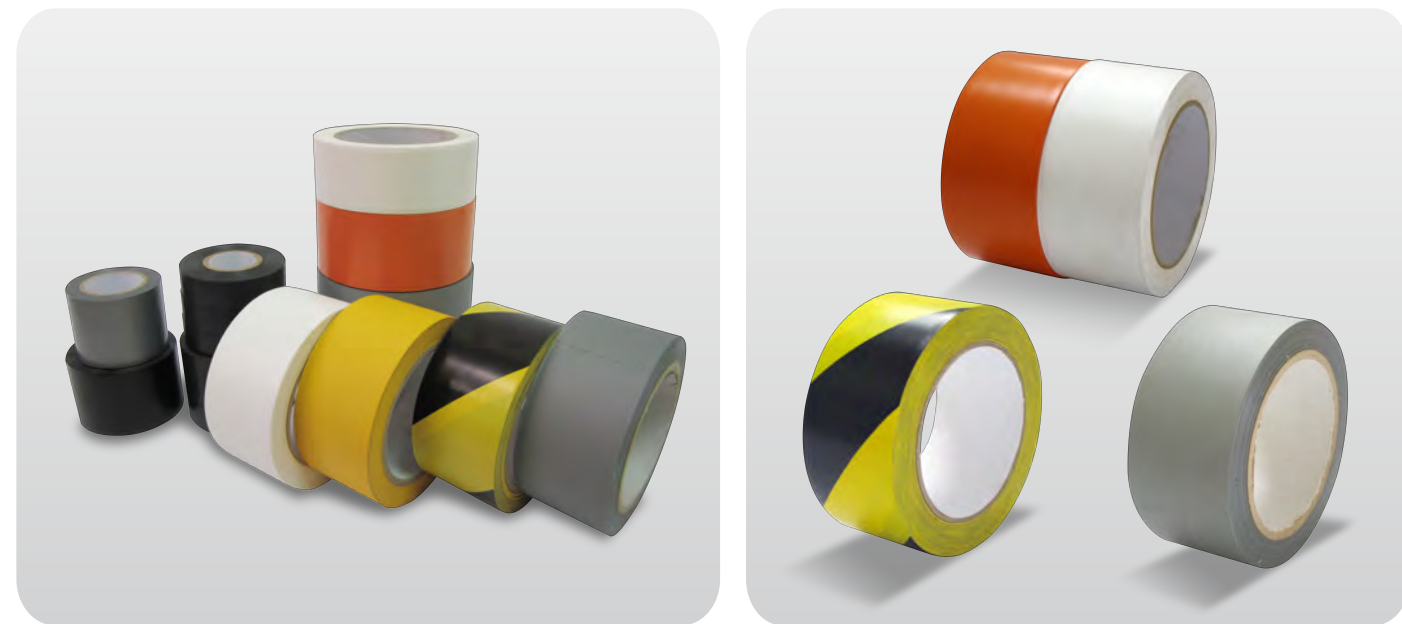


Item no.	Thickness	Color	Adhesion	Elongation	Tensile strength	Temperature resistance
311	0.11mm	black, red, yellow, blue, green, white, grey, brown, orange, red/white, yellow/black, yellow/green	1.0 N/cm	150%	13N/cm	80 °C
313	0.13mm		1.0 N/cm	150%	15N/cm	80 °C
315	0.15mm		1.0 N/cm	150%	18N/cm	80 °C
318	0.18mm		1.0 N/cm	150%	25N/cm	80 °C

Item no.	Thickness	Color	Adhesion	Elongation	Tensile strength	Temperature resistance
4613	0.13mm	black, red, yellow, blue, green, white, grey, brown, orange	1.4 N/cm	180%	20N/cm	80 °C
4615	0.15mm		1.4 N/cm	180%	22N/cm	80 °C
4618	0.18mm		1.4 N/cm	180%	25N/cm	80 °C
4620	0.20mm		1.2 N/cm	200%	30N/cm	80 °C
4625	0.25mm		1.0 N/cm	250%	35N/cm	80 °C
4650	0.50mm		1.0 N/cm	250%	50N/cm	80 °C


Duct Cloth tape

Duct cloth tape is a synthetic rubber adhesive tape with a polyethylene laminated cloth. Good used for heavy-duty carton sealing, book spine binding, carpet joining, identification of package contents and destinations, and strapping and bundling. It comes in a range of colours: red, blue, green, black, yellow, grey, white, beige, and etc.

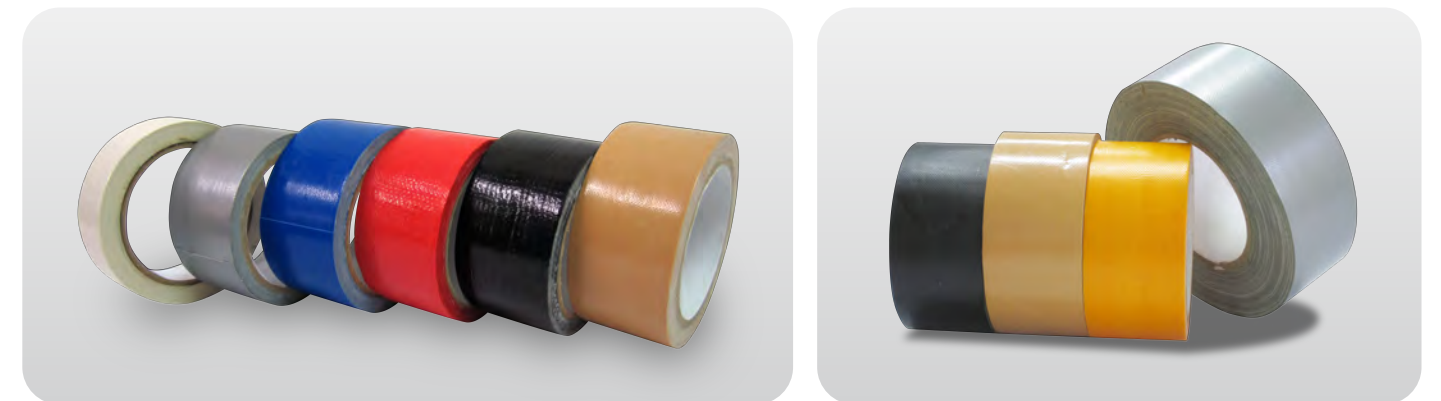

Crepe Paper Masking tape

A pressure sensitive tape made of crepe paper, coated with natural rubber based adhesive. Natural color, good conformability, strong holding power, no adhesive residue after peeling off, good retract ability, smooth trimmed edge. Crepe paper masking tape used for holding, bundling and sealing; insulation in automobile; color separation during spraying painting for furnitures and electrical industries.

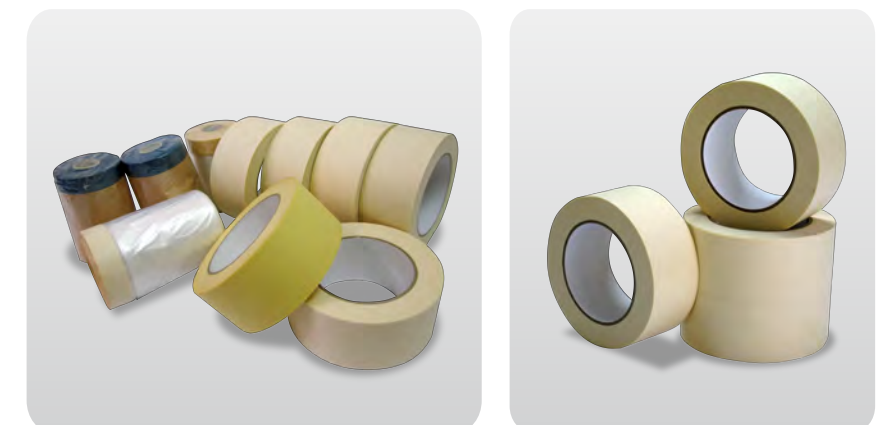

Item no.	Thickness	Color	Color	Adhesion	Elongation	Temperature resistance
6838	0.14	Crepe Paper	Nature Rubber	≥ 5.8 N/in	10%	60 °C
4457	0.14	Crepe Paper	Nature Rubber	≥ 7.6 N/in	10%	80 °C
4467	0.14	Crepe Paper	Nature Rubber	≥ 8.7 N/in	10%	100 °C
4468	0.14	Crepe Paper	Nature Rubber	≥ 9.0 N/in	10%	120 °C

OPP packaging tape

OPP packaging tape is a high-tack adhesive tape of biaxially oriented polypropylene (BOPP) film coated with acrylic emulsion adhesive, or hot-melt based adhesive. OPP packaging tape is widely used in carton sealing and other applications, as it offers excellent clarity and is suitable for long-term storage. Customized color or printing available.




Item no.	Thickness	Adhesive	Initial Tack	Holding Power	Peeling strength (N/in)	Tensile Strength (N/in)	Elongation (%)
7738	38mic	water based	#14	>24HS	5.5N	≥75N	<110
7740	40mic	water based	#16	>24HS	6.0N	≥75N	< 110
7742	42mic	water based	#16	>24HS	6.0N	≥75N	< 110
7743	43mic	water based	#16	>24HS	6.5N	≥75N	< 110
7745	45mic	water based	#18	>24HS	7.0N	≥75N	< 110
7747	47mic	water based	#18	>24HS	7.0N	≥78N	< 120
7748	48mic	water based	#18	>24HS	7.0N	≥78N	< 120
7750	50mic	water based	#18	>24HS	7.0N	≥78N	< 120
7640	40mic	Hot melt	#14	>24HS	10.0N	≥80N	< 110
7642	42mic	Hot melt	#14	>24HS	10.0N	≥80N	< 120
7645	45mic	Hot melt	#14	>24HS	13.0N	≥90N	< 120
7650	50mic	Hot melt	#14	>24HS	13.0N	≥95N	< 120
7943	43mic	solvent based	#16	>24HS	6.5N	≥75N	< 110
7945	45mic	solvent based	#18	>24HS	7.0N	≥75N	< 110
7947	47mic	solvent based	#18	>24HS	7.0N	≥78N	< 120
7948	48mic	solvent based	#18	>24HS	7.0N	≥78N	< 120
7950	50mic	solvent based	#18	>24HS	7.0N	≥78N	< 120

Kraft tape

Kraft paper tape is an environment friendly product which coated with synthetic rubber adhesion or moisture activated adhesive. Good used for sealing cartons, storage packing, temporarily fixing, and sealing electrical and mechanical parts for conservation. Also available for machinery packing.

Application

Joining paper, sealing box, bounding articles, apply to crack of home decoration, machine parts and electronic product etc.

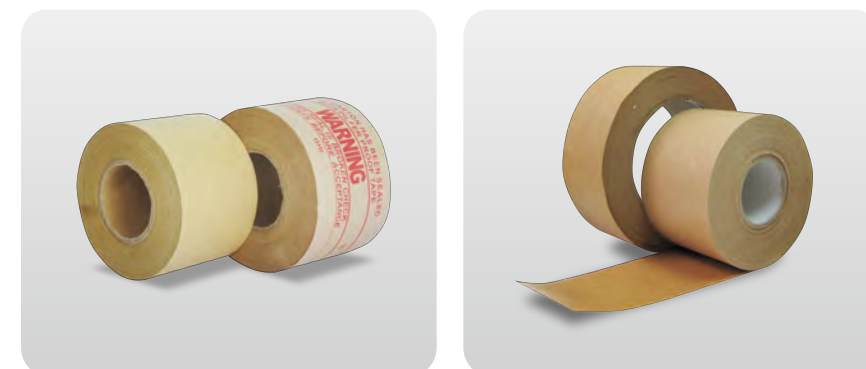

Bag Sealing Tape

Features

PE or OPP material backing coated with synthetic resin for sealing plastic bag, Suitable for sealing shirt bags, courier bags, security bags and all kinds of plastic bags, Self-adhesive and reusable tapes for sealing PE and OPP plastic bags.





Item no.	Width	Length (meters)	Application	relee liner	Tack	Peel Adhesion
2912	12mm	500/3000/5000	Permanent	PP	#12	≥0.30 kg/in
2915	15mm	500/3000/5000	Permanent	PP	#12	≥0.30 kg/in
2212	12mm	1000/5000/10000	Resealable	PP/PE	#12	≥0.10 kg/in
2215	15mm	1000/5000/10000	Resealable	PP/PE	#12	≥0.10 kg/in

Filament Tape

Good packaging solution of glass fiber filament backing coated with high performance adhesive. Extensively use in home appliance, furniture industry, wire rope, and heavy object.

Features

- High tensile strength.
- High share and good initial adhesion.
- Good holding power.
- Highly resistant to abrasion and moisture.

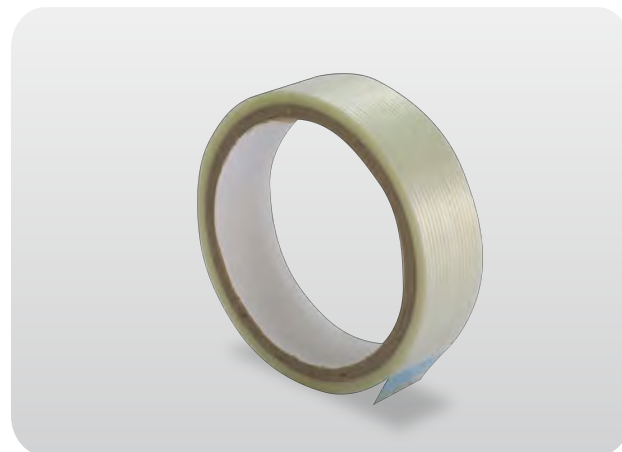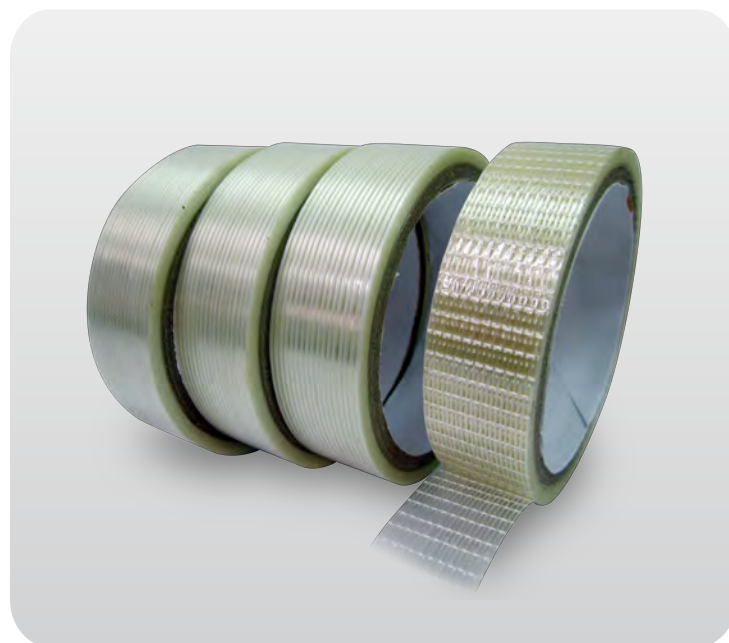

Item no.	Backing	Thickness	Fiber		Adhesive	Elongation	Tensile Strength
302P	OPP	0.12	one direction	Middle	18	5%	500
305P	OPP	0.12	one direction	High	18	5%	600
315P	OPP	0.14	one direction	Super	18	5%	800
351I	PET	0.14	one direction	Middle	18	5%	800
358I	PET	0.16	one direction	High	22	5%	1100
359I	PET	1.18	one direction	High	20	5%	1600
X02P	OPP	0.15	bi-direction	Middle	23	5%	550
X26I	PET	0.20	bi-direction	Middle	29	5%	300

Double Side Coated

Double Sided Tissue Tape

Double sided tissue tape coated with acrylic solvent, acrylic water, and hot melt adhesive for various application. Excellent adhesion and temperature resistance. Good bonding adhesion to various kinds of backing materials, especially suitable for PVC, PE, ABS and camber surfaces

Application

- It is widely used industrial & household usage, including advertisement, shoes, garment, leather, computer embroidery, carpet jointing, sealing, protecting and book-mending etc.
- Can be used to Automobile interior materials & automobile double sided adhesives tape, electronic , electrical appliances, packaging, construction, furniture, daily use accessories, medical industry, fill crack, adornment, car MARK adhesive etc.
- Sticking signboard, mirror, map etc., also apply to eliminating sound and reducing vibration. Packing for electric accessories and protection for glass board, etc.
- It is suitable for food packaging, stationery, office, hand, clothing, hardware, electronic appliances, and vehicles and so on.



Double Sided Foam Tape



Double sided PE Foam, Acrylic Foam, or EVA foam backing with strong solvent acrylic adhesive. Design for adhering to the irregular surface, fixing the nameplate, mirror, and widely used in automobile industry. PE plastic film, yellow silicone paper, white silicone paper, and yellow glassine silicone paper for customize choice.

Features

- High temperature foam tape can withstand long hanging items with strong adhesion, exceptionally strong retention
- High temperature resistance, high seal property.
- Good shock absorption, waterproof.

Application

- Applicable for permanent fixing
- For mounting decorative objects in cars, machines or houses.
- For irregular surface

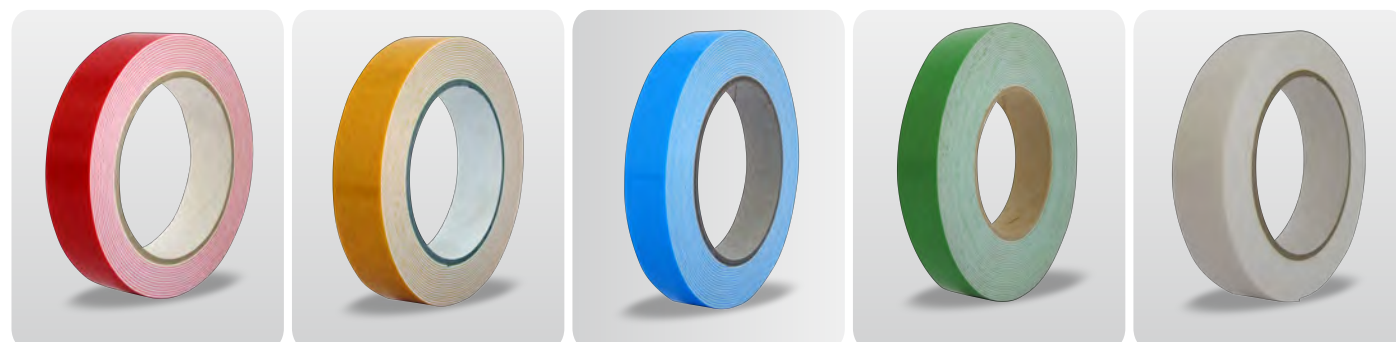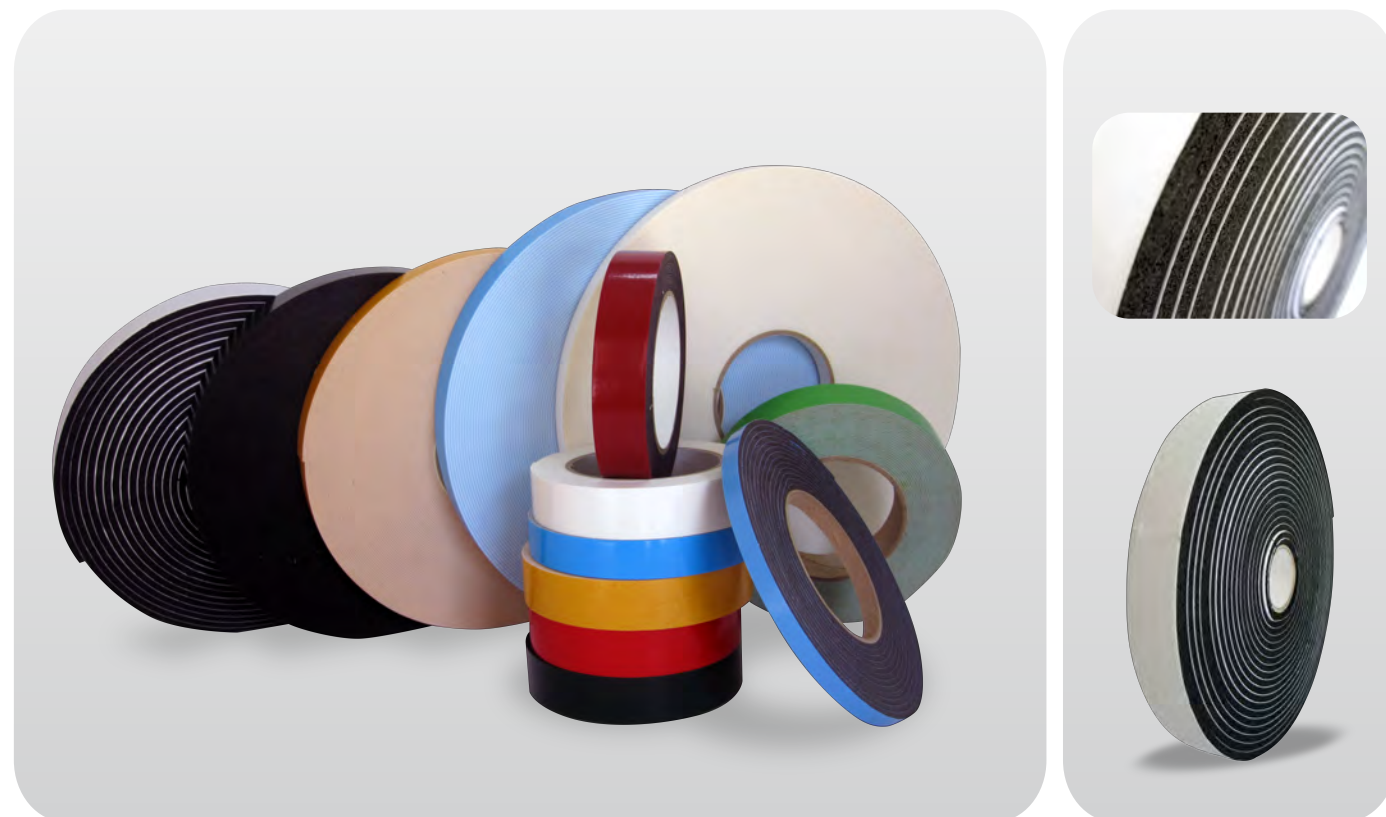

Double Sided Polyester Tape

Double sided transparent polyester tape coated with high performance acrylic solvent adhesive. Suitable heavy stress and high temperature resistant for permanent bonding.

Features

Excellent quick stick with strong adhesion.
High tensile strength.
Suitable for most demanding applications.
High temperature resistance.

Application

Mounting of ABS plastic parts.
Used in car industry.
Used in furniture industry.
Mounting of decorative profiles.
Mounting of battery packs, lenses and touch-screen in electronic devices.



Double side PP Tape

PP double sided tapes coated with acrylic adhesive and have strong viscosity. Excellent chemical resistance capabilities and high temperature resistant. Excellent weather resistance and durability.

Features

Strong initial adhesive and excellent softness
Be able to get highly adhesion to objects

Application

Widely used as splicing and fixed material for carpet installation, wall decoration, splicing and fastening of metal things a.



Double side Cloth Tape

Double Sided Cloth Tape, Carpet Tape, Cloth Tape is a two-sided high performance synthetic rubber tape on a cloth carrier which features residue free removal.

Features

- Easy to install and tear by hand.
- High strength, with quick-stick and high adhesion.
- Accommodates irregular surfaces.
- Removes easily without leaving residue.


Application

- Carpet hold-down specially designed for conventions & exhibitions.
- General purpose uses in manufacture and construction.
- Multi-purpose use for general mounting and holding.
- Temporary holding applications for industrial use.
- Hold a plastic drop cloth in place while painting



Double -coated Acrylic Foam Tape

Double coated Acrylic foam Tape with high strength conformation and high shear resistance provides conformation bond to most different application. Easy apply to metal, glass, and high surface energy plastic substrates like automotive accessories, electronic components, and house ware.

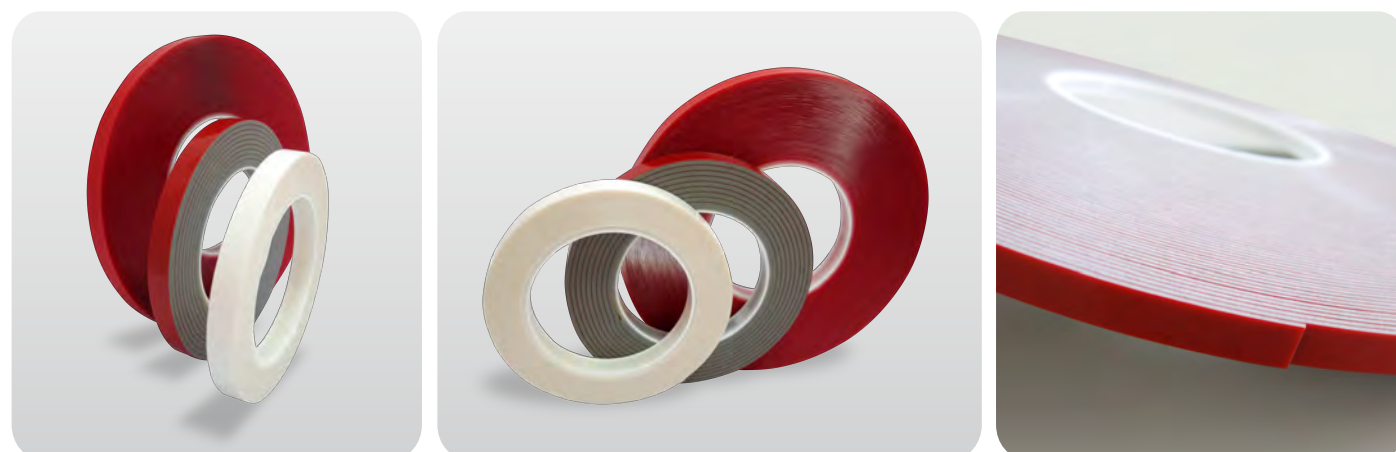

Backing	Color	Liner	Adhesive	Thickness	Max. Width	Max. Length
Tissue	transparent	white silicon coated paper	Acrylic Solvent	0.09mm	1260mm	1000m
Tissue	transparent	white silicon coated paper	Acrylic Solvent	0.10mm	1260mm	1000m
Tissue	transparent	white silicon coated paper	Acrylic Solvent	0.13mm	1260mm	800m
Tissue	transparent	white silicon coated paper	Acrylic Solvent	0.14mm	1260mm	500m
Tissue	transparent	white silicon coated paper	Acrylic Solvent	0.16mm	1260mm	500m
Tissue	transparent	white silicon coated paper	Acrylic Solvent	0.125mm	1270mm	1000m
Tissue	transparent	white silicon coated paper	Acrylic Solvent	0.15mm	1070mm	800m
Tissue	transparent	yellow glassing paper	Acrylic Solvent	0.13mm	1260mm	800m
Tissue	transparent	yellow glassing paper	Acrylic Solvent	0.14mm	1260mm	500m
Tissue	transparent	yellow glassing paper	Acrylic Solvent	0.16mm	1260mm	500m
Tissue	transparent	white silicon coated paper	Acrylic Water	0.08mm	1260mm	1000m
Tissue	transparent	white silicon coated paper	Acrylic Water	0.10mm	1260mm	1000m
Tissue	transparent	white silicon coated paper	hotmelt	0.08mm	1260mm	1000m
Tissue	transparent	white silicon coated paper	hotmelt	0.10mm	1260mm	1000m
Polyester	transparent	MOPP red	Acrylic Solvent	0.16mm	1270mm	600m
Polyester	transparent	MOPP red	Acrylic Solvent	0.21mm	1270mm	600m
Polyester	transparent	white silicon coated paper	Acrylic Solvent	0.08mm	1270mm	600m
Polyester	transparent	white silicon coated paper	Acrylic Solvent	0.11mm	1270mm	600m
Polyester	transparent	white silicon coated paper	Acrylic Solvent	0.16mm	1270mm	600m
PP	white	white silicon coated paper	Rubber based hotmelt	0.09mm	1060mm	1000m
PP	transparent	yellow glassing paper	Acrylic Solvent	0.09mm	1060mm	1000m
Cloth	white	yellow glassing paper	Rubber based hotmelt	0.24mm	1060mm	500m
PVC	transparent	yellow glassing paper	Acrylic Solvent	0.22mm	1270mm	500m
PVC	transparent	yellow glassing paper	Acrylic Solvent	0.26mm	1270mm	500m
PE Foam	white, black	white, yellow, green, red, blue	Acrylic Solvent	0.8mm	1070mm	300m
PE Foam	white, black	white, yellow, green, red, blue	Acrylic Solvent	1.0mm	1070mm	300m
PE Foam	white, black	white, yellow, green, red, blue	Acrylic Solvent	1.5mm	1070mm	300m
PE Foam	black	green, red	Acrylic Solvent	3.0mm	1070mm	100m
Acrylic Foam	grey, black, white	red, white	Acrylic Solvent	0.4mm	900mm	33m
Acrylic Foam	transparent	red, white	Acrylic Solvent	0.4mm	500mm	33m
Acrylic Foam	grey, black, white	red, white	Acrylic Solvent	0.64mm	900mm	33m
Acrylic Foam	grey, black, white	red, white	Acrylic Solvent	0.8mm	900mm	33m
Acrylic Foam	grey, black, white	red, white	Acrylic Solvent	0.8mm	900mm	33m
Acrylic Foam	grey, black, white	red, white	Acrylic Solvent	1.0mm	900mm	33m
Acrylic Foam	transparent	red, white	Acrylic Solvent	1.0mm	500mm	33m
Acrylic Foam	grey, black, white	red, white	Acrylic Solvent	1.1mm	900mm	33m
Acrylic Foam	grey, black, white	red, white	Acrylic Solvent	2.0mm	900mm	33m
Acrylic Foam	transparent	red, white	Acrylic Solvent	2.0mm	500mm	33m